


SEALIFT²
SEALIFT

Oceans apart from
any other boat lift



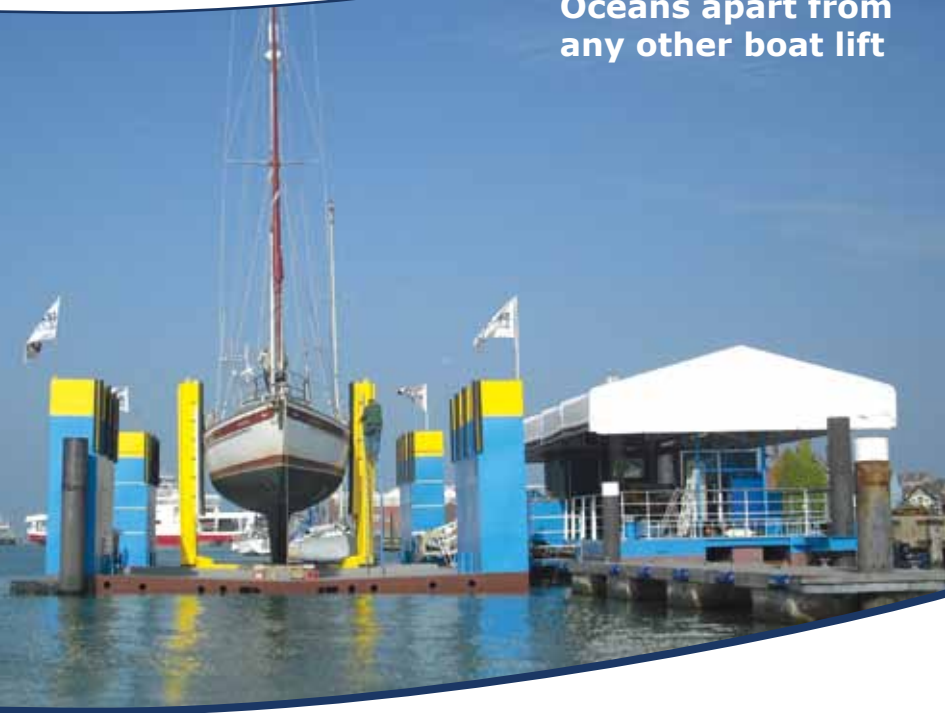


Available in single and double dock configurations, the **Sealift2/SD** floating dry dock provides marina operators and boat yard owners with a unique solution to the ever increasing loss of premium water front land to residential and commercial development.

With its high throughput **Sealift2/SD** yields excellent returns on investment when compared to traditional alternatives such as travel lifts and cranes, without the expensive civil engineering works usually associated with installing a travel lift.

Sealift2/SD will complement existing haul out facilities by enabling you to offer fast cleaning, diagnostic and surveying services, whilst optimising the use of existing shore based facilities for longer term jobs such as re-fits and engine replacement - a combination that will attract more boat owners and increase customer satisfaction levels.



Sealift2 International Limited is proud to present its new **Sealift2/SD** shallow draught floating dry dock, a self-contained, eco-friendly unit capable of lifting 60ft motor boats and yachts weighing up to 50 tons.

FAST: Lifts 50 tons in 5 minutes using Sealift2's unique pneumatic lifting system. Lift, clean and re-launch in less than an hour.

ECO-FRIENDLY: Collects and treats all potentially toxic wash off.

ECONOMICAL: Low running costs and straightforward installation. **Sealift2/SD** does not require the expensive civil engineering works typically required for the installation of a travel lift.

EFFICIENT: Achieve high returns on investment by offering a fast, cost effective alternative to the traditional annual haul out.


Creative Marine Innovation

www.sealift2.com +44 (0) 1628 627298

Technical specifications

Equipment

Air compressor:	Atlas Copco XAS 186Dd 395 cfm at 7 bar
Jet washers:	2 x Karcher HD 13/12 4ST
Water storage tanks:	25 tons
Waste pump:	Godwins CD75/7.5 KW dry prime pump - handles solids up to 30mm
Water lift pump:	Lowara Ceam 70/75 V/A
Bilge pumps:	2 x Sahara series automatic
Hydraulics:	100 litre tank, 7.5KW motor, 44 l/m pump
Motor boat supports:	2 off aluminium stools SWL 33 tons each



Technical specifications

Boat lift capacity

Maximum displacement:	50.00 tons
Maximum waterline length:	18.016m (59ft 1in)
Maximum Beam:	7.75m (25ft 5in)
Minimum Beam:	2.11m (6ft 11in)
Maximum Draught:	3.00m (9ft 10in)

Dimensions (width x length)

Dry dock:	18.016m x 10.298m (59ft 1in x 33ft 9in)
Catamaran:	15.0m x 6.0m (49ft 3in x 19ft 8in)
Max combined footprint:	19.611m x 18.189m (64ft 4in x 59ft 8in)
Draught to top of keel blocks:	2.0m (6ft 7in)

Sealift2 International Limited
11 Lower Cookham Road, Maidenhead
Berkshire, SL6 8JN, United Kingdom



Creative Marine Innovation

www.sealift2.com +44 (0) 1628 627298